

66/00/60



Jc674 U.S. PTO

# UTILITY PATENT APPLICATION AND FEE TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Attorney Docket No.	18036-12	Total Pages	51
First Named Inventor or Application Identifier			
Lars G. SVENSSON et al.			
Express Mail Label No.	EL270919728US		

Jc553 U.S. PTO  
09/30/99

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing.)
2. ☒ Specification Total Pages **35**  
 - Cover Sheet  
 - Descriptive title of the invention  
 - Background of the invention  
 - Brief Summary of the invention  
 - Brief Description of the Drawings (if filed)  
 - Detailed Description  
 - Claim(s)  
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) Total Sheets **14**
4. ☐ Oath or Declaration Total Pages **1**  
 a. ☐ Newly executed (original or copy)  
 b. ☐ Copy from a prior application (37 C.F.R. 1.63(d))  
 (for continuation/divisional with Box 17 completed)  
 (Note Box 5 below)  
 i. ☐ Deletion of Inventor(s)  
 Signed statement attached deleting inventor(s)  
 named in the prior application, see 37 C.F.R.  
 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked).  
 The entire disclosure of the prior application, from which  
 a copy of the oath or declaration is supplied under Box  
 4b, is considered as being part of the disclosure of the  
 accompanying application and is hereby incorporated  
 by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
 a. ☐ Computer readable copy  
 b. ☐ Paper copy (identical to computer copy)  
 c. ☐ Statement verifying identity of above  
 copies
8. ☐ Assignment Papers (cover sheet & documents)
9. ☐ 37 C.F.R. 3.73(b) Statement ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS  
 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior appln.  
 Statement(s) Status still proper and desired.
15. ☐ Certified Copy of Priority Document(s)  
(If foreign priority is claimed)
16. ☐ Other: Submission of Formal Drawings:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. :

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☒ New correspondence address below

OPPENHEIMER WOLFF & DONNELLY LLP  
 2029 Century Park East, Suite 3800  
 Los Angeles, California 90067 U.S.A.  
 Telephone (310) 788-5000 • Fax (310) 788-5100  
 Attn: Marc E. Brown, Esq.

**FEE CALCULATION**

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	74 - 20	54	\$ 22.00	\$1188.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	14 - 3	11	\$ 39.00	429.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$270.00	0
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
	Total of above Calculations =				\$ 2377.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28)				\$0
	TOTAL =				\$ 0

6. ☐ Small Entity Status
- a. ☐ A small entity statement is enclosed.
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.
7. ☐ The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No.:
- a. ☐ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.
8. ☐ A check in the amount of \$ is enclosed.
9. ☐ Other \_\_\_\_\_

Issuance at an early date of the "Notice to File Missing Parts - Filing Date Granted" is in order.

Express Mailing Label No. EL270919728US

I hereby certify that on **September 3, 1999**, I am depositing this correspondence and all listed attachments with the United States Postal Service "Express Mail Post Office to Addressee," service under 37 C.F.R. § 1.10, addressed to Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Jessica S. Brown

Dated: September 3, 1999

Marc E. Brown, Reg. No. 28,590

**OPPENHEIMER WOLFF & DONNELLY LLP**

2029 Century Park East, Suite 3800  
 Los Angeles, California 90067-3024  
 Telephone: (310) 788-5000  
 Facsimile: (310) 788-5100

**PATENT APPLICATION**

for

**UNITED STATES PATENT**

on

**POWER-EFFICIENT, PULSED DRIVING  
OF CAPACITIVE LOADS  
TO CONTROLLABLE VOLTAGE LEVELS**

ATTORNEY DOCKET NO. 18036-12  
SHEETS OF DRAWINGS: 14

OPPENHEIMER WOLFF & DONNELLY LLP  
2029 Century Park East, 38th Floor  
Los Angeles, California 90067  
(310) 788-5000

Inventors:  
Lars G. Svensson  
William C. Athas  
Rajat K. Lal

66E060" 1466E60

# **POWER-EFFICIENT, PULSED DRIVING OF CAPACITIVE LOADS TO CONTROLLABLE VOLTAGE LEVELS**

## **Government License Rights**

The U.S. Government has a paid-up license in this invention and the right in limited circumstances to require the patent owner to license others on reasonable terms as provided for by the terms of Grant No. DAAL01-95-K3528, awarded by DARPA.

## **Cross-Reference to Related Applications**

This application claims the benefit of U.S. Provisional Applications Nos. 60/099,120, filed September 3, 1998, and 60/143,665, filed July 14, 1999, the contents of which are incorporated herein by reference.

## **Background of Invention**

### **Field of the Invention**

This invention relates to driving capacitive loads and, more particularly, to driving liquid crystal displays ("LCDs").

### **Description of Related Art**

LCDs are in widespread use today, and their popularity is expected to increase. These devices operate by controlling the amount of light that is passed or reflected by a set of liquid crystal (LC) elements arranged in rows and columns in the display. Each LC element comprises a pair of plates surrounding liquid crystal material. The amount of light that is passed or reflected by an LC element is controlled by the voltage that is delivered to the plates of that element.

To maintain the amount of light passed or reflected by the LC element at a constant level, the voltage across the element must usually be reversed in polarity periodically. As a result, an AC signal is typically used to drive the element, the magnitude of the signal determining the amount of light that is passed or reflected.

A typical LCD has hundreds of thousands of LC elements arranged in hundreds of rows and columns. To reduce the amount of circuitry that is needed to drive each LC element, all LC elements in the same row typically communicate through a single row line, while all elements in the same column typically communicate through a single column line. Each LC element is thus uniquely defined by the row and column line that intersect at its location. The

voltage across each element is regulated by controlling the amount of charge that is delivered to it through its coordinating row or column line.

The picture displayed by an LCD is typically painted by sequentially scanning each line of the display, somewhat like the way a picture is painted in a television set. For example, the first row line might be activated, followed by the delivery of the desired signal to the first column line, thus establishing the desired voltage across the first element in the first row. While the first row line is still activated, the desired signal would then be delivered to the second column line, thus establishing the desired voltage across the second element in the first row. This process would typically continue until all of the elements in the first row are set to their desired levels. Alternatively, the desired voltage across all of the elements in a row can be applied at the same time.

The second row line would then be activated, followed by the sequential or simultaneous charging of each LC element in the second row. This process would continue until the voltages across all of the LC elements in the display are set to their desired levels. This entire cycle would then repeat itself a short time later, but with the voltages being of opposite polarity, to provide the refreshment needed for each LC element.

Electronic switches are often used to controllably connect and disconnect each element to its associated column line. The control input to these switches is typically connected to the row line at which each switch resides. These switches, however, also often have intrinsic capacitance.

Although only one LC element in a column is typically charged at a time, the switches that are associated with the elements that are not being driven typically also impose a significant amount of capacitance on the column line through which the voltage is being delivered to the single element that is being driven. Because there are typically hundreds of rows of LC elements that are connected to the column line through which the voltage is being delivered to the single element, the combined effect of the capacitance imposed by these inactive switches often imposes hundreds of times the amount of capacitance that is exhibited by the single element that is being driven.

There is also often significant intrinsic capacitance between the lines that control the LC elements and the backplane of the display.

This very large amount of combined capacitance on the column lines often causes large amounts of energy to be dissipated during the use of the LCD. As the voltage on each LC element is being reversed in polarity, the voltage on the much-larger capacitance that is imposed on the line must also usually be changed. This typically requires a large amount of current. In turn, the passage of this current through the resistances of the switching devices and other components that are necessary to drive the LCD causes large amounts of energy to be dissipated.

As a result, hundreds of times the amount of energy that is actually needed to drive each LC element is often wasted because of the large capacitance that is associated with the lines through which the voltages to the elements are delivered.

This large wasted energy is particularly problematic in applications in which energy dissipation needs to be minimized, such as in portable laptop computers. As is well known, the time a single charged battery can run a laptop is a very important specification. The significance of the energy being wasted in driving the lines of an LCD is becoming even more important in view of new technologies that are reducing the energy needed in other areas of the laptop computer. This includes new technologies that are eliminating the need for backlighting of displays and new technologies that are reducing the energy consumed by the microprocessor circuitry and associated storage devices.

### **Summary of Invention**

One object of the invention is to minimize these as well as other problems in the prior art.

Another object of the invention is to provide a system and method for driving capacitive loads to controllable voltage levels in a power-efficient manner.

A still further object of the invention is to provide a system and method for recovering energy that is stored in a capacitive load.

A still further object of the invention is to recover energy that is stored in capacitances associated with the driving lines of an LCD, other than in the LC elements.

A still further object of the invention is to reduce the amount of energy that is needed to drive an LCD.

These as well as still further objects, features and benefits of the invention are achieved through the use of a system and method that drives capacitive loads to controllable voltage levels in an energy-efficient manner.

In one embodiment of the invention, one of the LC elements is charged by delivering a voltage on the line that is associated with the element. Energy is then recovered from the other capacitances that are associated with the line while the voltage across the charged element is maintained. This process may then be repeated until all of the other elements in the display are driven.

In one embodiment of the invention, each LC element is connected to its associated column line through an electronic switch that is controlled by the row line associated with the element.

In one embodiment of the invention, adiabatic charging is used to drive the LC elements. This can utilize various signals, including a ramp signal, a staircase signal, or a half-wave sine pulse.

In one embodiment of the invention, adiabatic discharging is used to recover the energy from the driving line. This can similarly use a variety of signals, including a ramp signal, a staircase signal or a half-wave sine pulse.

The invention also includes a circuit for reducing the energy consumed by a display. In one embodiment, the circuit advantageously includes a voltage connection system connected to the driving line for controllably causing the driving line to connect to a voltage source; a recovery connection system for connecting to a driving line for controllably causing the driving line to connect to a reservoir; and a control system for causing the voltage connection system to connect the driving line to a voltage source during a first time period and for causing the recovery connection system to connect the driving line to the reservoir during a second time period. In one embodiment, the display is an LCD and voltages on the LC elements are not materially changed during the second time period.

In a still further embodiment, the source and the reservoir constitute a single supply that generates a signal conducive to adiabatic charging and discharging. The voltage connection system includes a first electronic switching system connected between the supply and the driving line. The recovery system includes a second electronic switching system connected between the supply and the driving line. The control system controls the first and

second electronic switching systems. The adiabatic charging and discharging may use a variety of signals, including a ramp signal, a staircase signal, or a half-wave sine pulse.

In a still further embodiment of the invention, the first electronic switching system includes a transmission gate connected in series with a MOSFET. The second electronic switching system may also advantageously include a MOSFET.

In a still further embodiment of the invention, the second time period begins a pre-determined amount of time after the first time period. In an alternate embodiment, the second time period begins when the voltage of the supply is approximately equal to the voltage of the driving line. A comparator circuit may advantageously be connected to the supply and the driving line for determining when the voltage of the supply is substantially equal to the voltage of the driving line.

In a still further embodiment, the display is an LCD, an electroluminescence display or a field-emission display.

In a still further embodiment of the invention, the circuitry and process is adapted to work in conjunction with a serial video signal, such as the serial video signal delivered at a VGA port.

Although having thus-far been described as useful for displays, the invention is also useful in a broad array of systems in which a capacitive load or capacitive loads must be driven to a controllable voltage level or voltage levels.

These as well as still further features, objects and benefits of the invention will now become clear upon consideration of the following detailed descriptions of the preferred embodiments, taken in conjunction with the drawings that are attached.

#### **Brief Description of Drawings**

FIG. 1 illustrates a portion of a typical prior art LCD.

FIG. 2 is a block diagram of one embodiment of the invention shown connected to the combined capacitance that is imposed on a single line in a display.

FIG. 3 is a flow diagram of the process employed in the embodiment of the invention shown in FIG. 2.

FIG. 4 is a schematic of one embodiment of a circuit that can advantageously be used to implement a portion of the invention.



FIG. 5 is a diagram illustrating various signals present during the operation of the circuit shown in FIG. 4.

FIG. 6 is a schematic of a circuit that produces a signal useful in adiabatic charging and/or discharging.

FIG. 7 is a schematic of a circuit that uses a set of capacitors to furnish the voltage levels necessary for generating a staircase signal useful in adiabatic charging and/or discharging.

FIG. 8 illustrates a half-wave sine pulse that is useful in adiabatic charging and/or discharging.

FIG. 9 is a block diagram of a collection of drivers that may advantageously be used for an LCD, incorporating concepts of the invention.

FIG. 10 is a schematic of a comparator circuit that generates a signal that can be used to activate the energy recovery phase of the system.

FIG. 11 illustrates portions of a circuit that can advantageously be used to sample the desired input voltage to effectuate pipelining.

FIG. 12 illustrates a portion of a typical prior art LCD used to display a serial video signal.

FIG. 13 is a schematic of one embodiment of a circuit that can advantageously be used to implement portions of the invention in connection with a display for a serial video signal.

FIG. 14 is a diagram illustrating various signals that are present during the operation of the circuit shown in FIG. 13.

### **Detailed Description of Preferred Embodiments**

FIG. 1 illustrates a portion of a typical prior art LCD.

As shown in FIG. 1, the LCD includes a plurality of LC elements arranged in rows and columns, such as LC elements 1, 3, 5 and 7 arranged in rows 9 and 11 and columns 13 and 15.

As is well known, each LC element includes liquid crystal material, such as liquid crystal materials 25, 27, 29 and 31, sandwiched between a set of plates, such as plates 33 and 35, plates 37 and 39, plates 41 and 43, and plates 45 and 47, respectfully. The amount of light which is permitted to pass through each element is directly related to the voltage that is placed across the plates surrounding each liquid crystal material.

As is also well known, there are many types of LCDs, including active-matrix, thin-film-transistor ("AMTFT") panel types and passive-matrix, super-twisted nematic ("PMSTN") panel types. Some LCDs, moreover, include backlighting, while others do not.

There are also a broad variety of techniques used to drive each LC element. As indicated in the Description of Related Art above, the voltage on each element is usually periodically reversed in order to maintain the same level of light transmittance. In some embodiments, one plate of the element is connected to a constant voltage, such as ground, and the other plate is driven both positively and negatively. In other embodiments, one plate of each element is connected to a square-wave signal having the same amplitude as the maximum data line swing and either the frequency of the frame or the line. This latter approach reduces the amount of swing needed on the data line, but increases the amount of flicker. In a still further embodiment, one plate is connected to a voltage that is half of the maximum driving voltage.

The invention is applicable to all of these embodiments, as well as to others. For illustration purposes, however, FIG. 1 illustrates a portion of a typical active-matrix display with one connection of each LC element 1, 3, 5 and 7 going to ground.

In this embodiment, the other connection of each LC element is connected to a switch. Thus, one connection of LC element 1 is connected to a switch 49, one connection of LC element 3 is connected to a switch 51, one connection of LC element 5 is connected to a switch 53, and one connection of LC element 7 is connected to a switch 55.

In this embodiment, the control lines of each switch are connected to a row line, such as a control line 57 of switch 49 and a control line 59 of switch 51 being connected to a row line 65, and a control line 61 of switch 53 and a control line 63 of switch 55 being connected to a row line 67. Similarly, the input to each switch is typically connected to a column line, such as an input 69 to the switch 49 and an input 71 to the switch 53 to a column line 73 and an input 75 to the switch 51 and an input 77 to the switch 55 to a column line 79.

Each row line may be actuated sequentially by the delivery of a signal on that row line to its driver, such as a driver 81 for the row line 65 and a driver 83 for the row line 67. While a particular row line is actuated, the voltage that is needed to be placed across each LC element connected to that row line is typically delivered on the column line that coordinates with that LC element. This process may continue sequentially from one column line to the

next, until all of the LC elements in a row are driven to their desired states, or simultaneously to all of the LC elements in a row. Drivers, such as a driver 85 for the column line 73 and a driver 87 for the column line 79, are typically used to facilitate this process. Typically, only one row line is actuated at a time.

Only a portion of a typical LCD is illustrated in FIG. 1. An actual LCD would usually have hundreds of rows and hundreds of columns of LC elements with all of the associated lines and components that have been described above being duplicated to match.

As also explained in the Description of Related Art above, there are other large capacitances that typically must be driven by each row and column line, while each LC element is being driven. This includes the capacitance between the driving line and the backplane of the LCD, as well as the capacitance that is intrinsic to each of the other switches that are attached to the driving line, even in their off state. The amount of this other capacitance is typically hundreds of times the amount of the capacitance intrinsic to each LC element. Having to constantly move these other large capacitances through large voltage swings usually wastes large amounts of energy in the resistance of the switching system that is used to drive these displays, as well as in the resistance that is intrinsic to the source or sources of supply (also not shown) that drive these lines. This wasted energy is particularly high in the column lines which are usually going through large voltage swings on a very frequent basis.

FIG. 2 is a block diagram of one embodiment of the invention shown connected to the combined capacitance that exists on a single line in a display. FIG. 3 is a flow diagram of the process employed in the embodiment of the invention shown in FIG. 2. The operation of the embodiment shown in FIG. 2 will now be explained in conjunction with the diagram of that process shown in FIG. 3 and the prior art LCD illustrated in FIG. 1.

The first step is for a particular row to be activated, such as, for example, by activating the row line 65 shown in FIG. 1.

Although switches, such as switches 49, 51, 53 and 55, shown in FIG. 1, act as control mechanisms for the rows of LC elements that are activated, it is to be understood that the invention is also applicable to displays in which the row lines are directly connected to the LC elements without any intervening switches, such as passive displays. In this instance, the other connection to the LC elements might be directly connected to their associated column

lines. For purposes of clarity, references in this application to “activating” a line are intended to apply to both types of situations, as well as to any other technique that is used to drive an LC element.

After a row is activated, the source is then connected to the column line that is associated with the LC element to be driven, such as to the column line 73 that is associated with LC element 1 in FIG. 1. This is reflected by a Connect Source to Driving Line block 101 in FIG. 3. The necessary voltage is then applied to the LC element in that row through the column line that is associated with that element. This step is reflected in a Deliver Voltage to LC Element block 102.

As explained above, there are capacitances associated with column lines, other than the capacitance imposed by the LC element being driven. The total capacitance imposed on a particular column line at any one time is illustrated in FIG. 2 as a capacitor 105. Although FIG. 2 illustrates one terminal of this total capacitance 105 as being connected to ground for simplicity, it is to be understood that, in practice, each of the contributing capacitive components may, in fact, be connected to different potentials.

To effectuate the driving of an LC element, such as the LC element 1 in FIG. 1, a control system 107 activates a voltage connection system 109 to connect a voltage source 111 to the column line associated with the LC element, such as the line 73 in FIG. 1. This causes the voltage source 111 to be connected to the entire capacitance that is imposed on the charging line, this entire capacitance being illustrated in FIG. 2 as the capacitor 105. The other LC elements in the same row may then be driven sequentially or simultaneously in the same manner.

After the LC element is driven to a desired state, its row line is deactivated. The circuit path for driving the LC element is broken and the voltage on the LC element remains to perpetuate the level of light conductivity that has been established by that voltage.

The control system 107 then signals the voltage connection system 109 to disconnect the source 111 from the column line, as reflected by a Disconnect Source From Driving Line block 103. The control system 107 then causes a recovery connection system 115 to connect the column line to a reservoir 117, as reflected by a Connect Reservoir to Driving Line block 113. The energy that is stored in the capacitances associated with the column line (again, shown as the capacitor 105) is then recovered and stored in the reservoir 117. This is reflected

in a Recover Energy block 119 in FIG. 3. Finally, the reservoir is disconnected from the column line, as reflected by a Disconnect Reservoir from Driving Line block 119.

Significantly, the voltage that was placed on the LC element is not affected during the recovery phase because the circuit to the plates of the LC element is broken during this phase, as explained above, while the energy is being recovered from the other capacitances.

This driving and recovery cycle can then be repeated in the course of driving the other LC elements in the display, as well as during subsequent frames when the light transmittance on the already driven element is either maintained through the application of an equal but opposite voltage or is changed through the application of a voltage having a different voltage.

Both the voltage connection system 109 and the recovery connection system 115 may include electronic switches, such as transistors (e.g., FETs or MOSFETs) and gates, that are controlled by the control system 107. The control system 107, in turn, may include electronic circuitry, such as transistors (e.g., FETs or MOSFETs) and gates, that generate the necessary control signals in accordance with well-known control signal techniques.

FIG. 4 is a schematic of one embodiment of a circuit that can advantageously be used to implement a portion of the invention.

The total capacitance imposed on a particular line 131 of an LCD, such as the column line 73 shown in FIG. 1, is modeled in FIG. 4 as a capacitor 133. As explained above, at this time, the total capacitance includes the capacitance imposed by the particular LC element that is connected to the line that is currently being driven, as well as the far more substantial capacitance between the particular line and the backplane and the capacitances associated with the other inactive switches that are connected to the same line. Although FIG. 4 illustrates one terminal of this total capacitance 133 as being connected to  $V_{DC}$  for simplicity, it is to be understood that, in practice, each of the contributing capacitive components may, in fact, be connected to different potentials.

The line 131 is connected to a terminal 135 of a transmission gate 137. The transmission gate 137 also has a control input 139, an inverting control input 141, and another terminal 143. As is well known, a transmission gate is a semiconductor device, typically including an N-channel semiconductor device connected in parallel to a P-channel semiconductor device, that electrically connects its two terminals upon receiving a control

signal at its control signal input and an inverting control signal at its inverting control signal input, without any appreciable voltage drop.

The terminal 143, in turn, is connected to a terminal 145 of an electronic switching device 147, such as a MOSFET. Another terminal 149 of the switching device 147 is connected to a voltage source  $V_A$  through a connection 151. The switching device 147 also has a control input terminal 153.

The line 131 is also connected to a terminal 163 of another transmission gate 155 which also has a control input 157, an inverting control input 159, and another terminal 161. The terminal 161 is also connected to the same voltage source  $V_A$  through the connection 151. As will soon be seen, the voltage source  $V_A$  simultaneously acts as a reservoir.

FIG. 5 is a diagram illustrating various signals present during the operation of the circuit shown in FIG. 4. The operation of the circuit shown in FIG. 4, as well as the signals that the circuit processes and generates, are best understood by consideration of FIGS. 4 and 5 together.

In one embodiment, the voltage source  $V_A$  is initially at zero, as shown in FIG. 5 by a line segment 201. Before the driving process begins, the transmission gate 155 is turned off by having its control input 157 switched off, as reflected by a line segment 203 shown in FIG. 5. Although not shown, it is to be understood that the inverse of the signal delivered to the control input 157 is always delivered to the inverting control input 159. This causes the circuit between terminals 161 and 163 to be open.

At about the time the voltage source  $V_A$  is about to rise, two things happen. First, a signal equivalent to the voltage that is desired to be placed across the LCD element that is being driven (plus the anticipated gate to source threshold voltage drop  $V_T$  in the switching device 147) is delivered to the control input terminal 153 of the switch, as shown by a line segment 205 in FIG. 5. Second, transmission gate 137 is activated by the delivery of an activation signal to its control input 139 and an inverse activation signal to its inverting control input 141. The activation signal is shown by a line segment 207 in FIG. 5. This causes the transmission gate 137 to connect its terminal 143 to the capacitances represented by capacitor 133.

At this early stage of the driving process, the desired level of voltage at the control input terminal 153 to the switching device 147 is greater than the output of the switching



FIG. 6 is a schematic of a circuit that produces another form of a signal useful in adiabatic charging, i.e., a staircase signal. As shown in FIG. 6, the combined capacitive load is illustrated as a capacitor 231. The ultimate voltage desired across the capacitor is  $V_N$ . A series of lower voltage steps are illustrated as  $V_1$ ,  $V_2$ , etc.

When it is desired to drive the capacitive load, i.e., the capacitor 231, a switch 233 is closed, causing the first level of the voltage  $V_1$  to be applied. Next, the switch 233 is opened and a switch 235 is closed, causing the next level of voltage  $V_2$  to be applied. This process continues until the final voltage level  $V_N$  is applied through the closure of a switch 237. A switch 239 is also provided to discharge the capacitive load 231 at the appropriate time.

FIG. 7 is a schematic of a circuit that uses a set of capacitors to furnish the voltage levels necessary for generating a staircase signal used in adiabatic charging. As with FIG. 6, the combined capacitive load to be charged is illustrated as a capacitor 251 connected to a series of stepping switches 255, 257 and ultimately 259, as well as a discharge switch 261. In this case, however, the voltages necessary for each step before the desired voltage  $V_N$  is reached are supplied by a series of capacitors, including capacitors 262 and 263. Using appropriate circuitry and timing, these capacitors are charged to the appropriate step levels and, thereafter, function as the needed voltage sources for their respective steps.

More details concerning the use of a staircase signal for adiabatic charging can be found in U.S. Patent 5,473,526, the contents of which are incorporated herein by reference.

A still further example of a signal useful in adiabatic charging is shown in FIG. 8. FIG. 8 illustrates a half-wave sine pulse. Circuitry that may advantageously be used to generate such a half-wave sine pulse is described in U.S. Patent 5,559,478, the contents of which are also incorporated herein by reference.

As explained above, the vast majority of the current that must be delivered into a line in an LCD is needed to charge large capacitances other than the capacitance associated with the LC element that is being driven. This cause substantial energy to be wasted.

The use of adiabatic charging substantially reduces the energy losses associated with having to drive such a large capacitive load, as explained above.

There are also energy losses as the capacitances are discharged during the next cycle when the voltage on the LC element is reversed. The systems shown and described in FIGS. 2



and 3, and the specific embodiment of these systems shown and described in FIGS. 4 and 5, also substantially reduce this problem.

After the voltage across the LC element that is being driven reaches its desired level, as shown by the point 211 in FIG. 5, the transmission gate 137 is turned off by the removal of the activation signal from its control input 139, as shown by a line segment 281 in FIG. 5. (Again, the complementary signal is delivered to the inverting control input 141.) This disconnects the capacitive load 133 from the connection 151 that goes to the voltage supply.

The row line that is activating the particular LC element that has just been charged is then deactivated. This disconnects the LC element from the driving line and leaves the voltage across the LC element (and thus the level of light transmittance of the LC element) intact. However, the energy contained in the other large capacitances that are associated with the driving line remains.

Next, the supply signal  $V_A$  starts to ramp back down, as shown by a line segment 283 in FIG. 5. At approximately the point when the supply voltage reaches the voltage on the column, as shown by a point 285, the transmission gate 155 is closed by the delivery of a control signal at its control input 157, as illustrated by a rising pulse 287. (Although not shown, a complementary segment is delivered to the inverting control input 159.) This causes the line containing the large parasitic charge to be connected to the source  $V_A$  through the connection 151. As the voltage source  $V_A$  continues to fall, as reflected by a line segment 289, energy stored in the parasitic capacitance is gradually returned to the voltage source  $V_A$  through the connection 151 during this recovery phase.

After substantially all of the energy has been recovered, the transmission gate 155 is opened by the removal of an activation signal from its control input 157, as shown by a line segment 291, and by the delivery of a complementary signal to its inverting control input 159. The system is then ready for the entire driving and recovery process to be repeated.

It should again be noted that, in this embodiment, the voltage source  $V_A$  does not rapidly fall from its maximum amplitude, such as would occur in the case of a fast-falling square-wave signal. A time-varying supply voltage is preferably used during the discharge phase, such as the ramp signal that is shown in FIG. 5 by the line segment 289. As in the driving phase, the use of a time-varying supply voltage during the recovery phase—adiabatic discharging—prevents high voltages from appearing across the resistive devices in the driving





Another approach is to compare the voltage of the downward ramp with the voltage across the capacitive load and to activate the transmission gate 155 when these voltages are approximately equal.

FIG. 10 is a schematic of a comparator circuit that generates a signal used to activate the energy recovery phase of the system. As shown in FIG. 10, the voltage supply  $V_A$  is delivered to a switch 401. The voltage  $V_{in}$  can be delivered to a control input 403 of the switch 401.

Before entry into the recovery phase, the circuit is reset by pulsing the pre-charge input PC to a gate 405 high and a complementary input to a gate 407 low. This causes the control output 409 of the circuit to be low and, in turn, to turn on a gate 410. After this pre-charge pulse, all switches in the device are off, including switches 411 and 413. However, switch 410 is on.

When  $V_A$  falls below  $V_{in}$  minus the threshold voltage  $V_T$  of the switch 401, the switch 401 turns on. Since the switch 410 is already on, charge from a gate 421 of the switch 413 begins to drain. When the potential of the gate 421 falls below the supply voltage,  $V_{dd}$ , less the threshold voltage  $V_T$  of the switch 413, the switch 413 turns on and pulls up the control output 409. When the control output 409 reaches  $V_T$ , the switch 411 turns on, pulling down the gate 421 further, thereby speeding up the transition of the control output 409 due to positive feedback.

As the control output 409 goes high, the switch 410 shuts off to isolate  $V_A$  from the switch 411 which would otherwise clamp it to ground.  $V_A$  is then brought high before the next cycle starts with a new pre-charge pulse to PC.

It should now be apparent that the control output 409 transitions when  $V_A$  falls below  $V_{in} - V_T$ , not when  $V_A$  falls below  $V_{in}$ . In other words, the comparator has an offset voltage of  $V_T$ . This is not a drawback when used with the output stage shown in FIG. 4. Control input 403 can be connected to control input terminal 153. The control output 409 then transitions when  $V_{in}$  equals  $V_A$ , as desired.

As illustrated in FIG. 5, the desired voltage  $V_{in}$  may change from its original value before discharging commences at point 285. This facilitates pipelining. However, the circuit shown in FIG. 10 requires the value of  $V_{in}$  to be known during the recovery phase.

One approach for handling these divergent needs is to sample the value of  $V_{in}$  at the input of the comparator at the point in time when the line becomes fully charged, i.e., at the point 211 in FIG. 5.

FIG. 11 illustrates a circuit that can advantageously be used to sample the desired input voltage to effectuate pipelining. As shown in FIG. 11,  $V_{in}$  is connected to the input of electronic switching device 147, exactly as it is shown in FIG. 4. Unlike what is shown in FIG. 10, however, the input to the switch 401 is connected to a transmission gate 501 and a storage capacitor 503. As should now be apparent, the transmission gate 501 is closed (by sending appropriate control signals to its complementary inputs 505 and 507) at some point in time while  $V_{in}$  is at its desired state, such as at some point in time during the line segment 205 shown in FIG. 5. At some point before the value of  $V_{in}$  changes, such as before the line segment 281 in FIG. 5, the transmission gate 501 is opened (again, by sending appropriate signals to its complementary inputs 505 and 507), causing the previous value of  $V_{in}$  to be stored on the storage capacitor 503 and, in turn, to continue to be input to the control input 403 of the comparator circuit shown in FIG. 10. Through the use of such a configuration, the value of  $V_{in}$  is preserved until it is no longer needed.

The invention is also applicable to displays that display video information received in a serial format in the form of a serial video signal, such as the serial video signal typically provided from the VGA port of a personal computer.

FIG. 12 illustrates a portion of the typical prior art LCD that has been used to display a serial video signal. As shown in FIG. 12, a serial video signal  $V_{in}$  is delivered to the display over a line 601. As is well known in the art, the voltage of such a signal varies as a function of time and, more precisely, as a function of the anticipated position of a scanning beam in a cathode ray tube (CRT). In order to capture this information, a typical prior art LC display includes a horizontal shift register 603 that shifts a single bit and is driven by a horizontal clock pulse  $H_{CLK}$  over a line 605. This causes the outputs of the horizontal shift register, two of which are shown as outputs 607 and 609, to turn on and off in sequence. The outputs of the horizontal shift register, in turn, are typically used to drive switches, such as switches 611 and 613. The outputs of these switches, in turn, drive the respective column lines to which they are attached, such as column lines 615 and 617, respectively.

The vertical shift register 619 similarly controls the activation of the row lines, such as row lines 621 and 623. This is similarly done by shifting a single bit through the register in response to a clocking signal  $V_{CLK}$  being delivered over a line 625. The activation of a row line, in turn, activates a switch that is associated with each LC element in the display, such as a switch 631 that is associated with an LC element 635, a switch 637 that is associated with an LC element 639, a switch 641 that is associated with an LC element 643, and a switch 645 that is associated with an LC element 647.

In operation, a first row line is actuated, such as the row line 621. As is well known, this readies the LC elements that are associated with that row to receive a voltage from their associated column lines.

Initially, the horizontal shift register 603 actuates the switch 611 which, in turn, connects the column line 615 to the serial video signal  $V_{in}$  over the line 601, thus delivering the serial video signal at this point in time to the LC element 635 in the first row and column. During the next time period, horizontal shift register 603 deactivates the line 607 which, in turn, turns off the switch 611 and thus disconnects the serial video signal  $V_{in}$  from the LC element 635. It instead connects the serial video signal  $V_{in}$  to the next column line through the next switch (neither of which are shown in FIG. 12). This process proceeds until ultimately the last switch 613 that controls the last column line 617 is actuated and the voltage of the serial video signal  $V_{in}$  at that point in time is then delivered to the last LC element 639 in the first row.

The vertical shift register 619 is then actuated by the  $V_{CLK}$  signal over the line 625, causing the first row line 621 to be deactuated and, in turn, the next row line (not shown) to be actuated. The voltage on the serial video signal  $V_{in}$  is then similarly delivered in sequence to each of the LC elements in the next row. This process continues until the last row line 623 is actuated by the vertical shift register 619 and the LC elements in this last row are set to the voltages dictated at the time of their setting by the serial video signal  $V_{in}$ .

Although the process of displaying a serial video signal is somewhat different from the process of displaying the parallel video signal discussed above in connection with FIG. 1, the energy wasted during this process is similar and can be substantially reduced through application of the present invention.

FIG. 13 is a schematic of one embodiment of a circuit that can advantageously be used to implement portions of the invention in connection with a display for a serial video signal. FIG. 14 is a diagram illustrating various signals that are present during the operation of the circuit shown in FIG. 13. The operation of the present invention in connection with a display for a serial video signal is best understood by a discussion of FIGS. 13 and 14 together.

As shown in FIG. 13, the serial video signal  $V_{in}$  is delivered over a line 701 to the input of a column storage switch for each column line, such as a column storage switch 703 for a column line 705.

It should be understood that the circuitry shown in FIG. 13 only shows a single LC element in the display, and that this circuitry would typically be duplicated for the other columns in the display. Similarly, the row lines, LC elements, and their associated switches would be duplicated for the other rows in the display. The output of the horizontal shift register HS that corresponds with the column line 705, such as the output 607 from the horizontal shift register 603 shown in FIG. 12, is connected to the input of the switch 703 over a line 709.

As shown by a pulse 710 in FIG. 14, the process in connection with the particular LC element 713 begins by the temporary activation of the output from the horizontal shift register HS that corresponds with the particular column that is being actuated. This signal is delivered over the line 709 to cause the switch 703 to close and, in turn, to cause the voltage of the serial video signal  $V_{in}$  to be imposed across a storage capacitor 711. In a preferred embodiment, nothing further is done at this moment to deliver the signal from the serial video signal  $V_{in}$  to the LC element 713. Instead, a similar process is employed in connection with all of the other switches and their associated storage capacitors (not shown in FIG. 13) that are associated with the other column lines in the display.

By the end of this process, the voltage that existed on the serial video signal  $V_{in}$  at the point in time when a particular column storage switch was actuated is now stored on the capacitor associated with that column switch, such as the capacitor 711 that is associated with the switch 703. After the sweeping of the row is completed and during the retrace period of the serial video signal  $V_{in}$ , the voltages that were stored on the storage capacitors are then, in turn, transferred to the LC elements that are associated with the storage capacitors in accordance with the process that will now be described.

Preferably, a time-varying source voltage  $V_A$  is delivered to an input 715 of a switch 717 that is configured to function as a voltage regulator. Initially, switch 717 is closed, due to the voltage across the capacitor 711. As a consequence, the rising voltage  $V_A$  as shown by a line 721 in FIG. 14 is transferred to the column line 705, as shown by a line 723 in FIG. 14. If desired, a row line 725 may be actuated when the voltage source  $V_A$  begins to rise, as reflected by a line segment 727 in FIG. 14. Alternatively, the actuation of the row line 725 may be deferred until later, as reflected by a line segment 729 in FIG. 14. In either case, the switch 717 will begin to shut off as the voltage  $V_A$  approaches the stored voltage on the capacitor 711, as reflected by a line 731 in FIG. 14. As soon as the voltage across the capacitor 711 is reached (less the threshold voltage across the switch 717), the switch 717 will turn off, leaving the desired voltage on the column line 705 and, in turn, across the LC element 713.

As indicated by the line segment 721 in FIG. 14, a time-varying voltage is preferably used for  $V_A$ , thus effectuating adiabatic charging. Although a ramp signal has been illustrated, it is of course to be understood that all of the other types of signals discussed above in connection with adiabatic charging may be used instead, such as a half-wave sine pulse or a staircase signal.

After the LC element 713 is fully charged, the row line 725 is typically deactivated, thus disconnecting the LC element 713 from the column line 705 through the operation of a transmission gate 732, as reflected in FIG. 14 by a line segment 733 (or in the alternative a line segment 735).

Next, the energy stored in the other capacitances associated with the column line 705 is recovered. As soon as the voltage source  $V_A$  falls below the voltage on the column line 705 (less the threshold in the switch 717), as reflected by a point 741 in FIG. 14, the switch 717 turns on, causing energy that was stored in the other capacitances associated with the line 705 to be returned to the source  $V_A$ . This process continues until the column line is discharged, as reflected by a point 743 in FIG. 14. Any remaining voltage on the column line 705 is then discharged through the activation of a discharge switch 745 with a column discharge signal CD. This reduces the possibility of noise that might otherwise result because of the then-floating status of the column line 705.



During this energy recovery phase, it is important to note that the voltage that was imposed across the LC element 713 has not changed, as reflected by a line segment 751 in FIG. 14.

As with the charging portion of the process, the discharging segment of the voltage source  $V_A$  is also preferably a time-varying signal, thus effectuating adiabatic discharging, as explained above. Again, any other type of time-varying signal could instead be used, such as the staircase signal or half-wave sine pulse discussed above.

In operation, the intrinsic capacitance of the switch 717 will often cause some current to flow between the voltage source  $V_A$  and the storage capacitor 711, even when the switch 717 is open. When this happens, the level of voltage that is stored on the storage capacitor 711 will change, potentially introducing an error. To minimize this error, the value of the storage capacitor 711 should be substantial in connection with the intrinsic capacitance of the junction of the switch 717. Alternatively, or in addition, the amount of this error can be calculated and compensated by an offsetting amount being imposed on  $V_{in}$ . Such an offsetting amount is capable of being provided, for example, by a table in the video driver card that generates the serial video signal  $V_{in}$  and/or by appropriate adjustments in the software driver that serves as an interface between the video driver card and the microprocessor of the personal computer.

In many displays, the second plate of each LC element, such as the plates 35, 39, 43 and 47 in FIG. 1, are not connected to ground, but are connected to a DC voltage that lies halfway between ground and the maximum voltage that is expected to be applied to the LC element. During even frames, the other plate of the LC element, such as the other plates 33, 37, 41 and 45 shown in FIG. 1, are driven between this mid-way value and the maximum value. During odd frames, the other plate is driven between zero and the mid-way value.

When using a staircase signal during adiabatic charging and/or discharging in this environment, it is often advantageous to utilize half of the number of steps in the staircase signal, during the period of time when a signal from zero to half of the maximum is needed. In one preferred embodiment, a seven-step staircase signal generator is used to generate the staircase signal during the odd frames, i.e., during the period of time when a signal from zero to half of a maximum is needed; while a fourteen-step staircase signal generator is used to supply the signal during even frames, i.e., during the period of time when a signal between

half and the full value is needed. When a fourteen-step staircase signal generator is used, of course, the escalating voltage source is not typically connected to the display until after the seventh step, thus ensuring against an unnecessary interim reversal in polarity across the LC element.

Although having now described certain embodiments of the invention, it is to be understood that the invention is of far broader scope and encompasses components, features, methods, and processes other than those that have been described. For example, the invention is broadly applicable to driving a broad variety of capacitive loads (e.g., capacitive electrostatic transducers and display devices based on electroluminescence or field-emission) to controllable voltage levels, not simply LCDs. Although having thus-far described the charge to each LC element as being delivered through its associated column line, it is, of course, understood that the charge might instead be delivered through its associated row line. In short, the invention is limited solely by the following claims.

## CLAIMS

1. A process for reducing the energy consumed by a display having a plurality of liquid crystal elements, the light passed by each liquid crystal element being regulated by a capacitive element associated with the liquid crystal element, each  
5 capacitive element having the ability to be selectively charged by the delivery of current through a line associated with the capacitive element, the line also driving one or more other capacitances in the display other than the capacitive elements, the process comprising:
  - a) charging a first one of the capacitive elements and at least a portion  
10 of the other capacitances by delivering a current through the line associated with the first one of the capacitive elements; and
  - b) recovering energy from the portion of the other capacitances without at the same time recovering energy stored in the first one of the capacitive elements.
2. The process of claim 1 wherein the process is repeated for each of the capacitive elements other than the first one of the capacitive elements and wherein energy is not recovered from any of the capacitive elements during the time that energy is recovered from the other capacitances.
3. The process of claim 1 wherein each capacitive element is connected to the line associated with the capacitive element through an electronic switch.
4. The process of claim 1 wherein adiabatic charging is used to charge the capacitive element.
5. The process of claim 4 wherein the adiabatic charging utilizes a ramp signal.
6. The process of claim 4 wherein the adiabatic charging utilizes a staircase signal.
7. The process of claim 4 wherein the adiabatic charging utilizes a half-wave sine pulse.
8. The process of claim 1 wherein adiabatic discharging is used to recover energy from the other capacitances.

9. The process of claim 8 wherein the adiabatic discharging utilizes a ramp signal.
10. The process of claim 8 wherein the adiabatic discharging utilizes a staircase signal.
11. The process of claim 8 wherein the adiabatic discharging utilizes a half-wave sine pulse.
12. The process of claim 1 wherein the display is a liquid crystal display, an electroluminescence display or a field-emission display.
13. A process for reducing the energy consumed by a display having a plurality of liquid crystal elements arranged in a plurality of rows and columns, the light passed by each liquid crystal element being regulated by a capacitive element associated with the liquid crystal element, each capacitive element having the ability to be selectively charged by the delivery of current through a line associated with the capacitive element, the line also driving one or more other capacitances in the display other than the capacitive elements, the process comprising:
  - a) charging a first one of the capacitive elements and at least one portion of the other capacitances by delivering a current through the line associated with the first one of the capacitive elements; and
  - b) recovering energy from the portion of the other capacitances without at the same time recovering energy stored in the first one of the capacitive elements or from the capacitive elements that are associated with the liquid crystal elements that are in the same row as the liquid crystal element that is associated with the first one of the capacitive elements.
14. The process of claim 13 wherein the process is repeated for each of the capacitive elements other than the first one of the capacitive elements and wherein energy is not recovered from any of the capacitive elements during the time that energy is recovered from the other capacitances.
15. The process of claim 13 wherein each capacitive element is connected to the line associated with the capacitive element through an electronic switch.
16. The process of claim 13 wherein adiabatic charging is used to charge the

capacitive element.

17. The process of claim 16 wherein the adiabatic charging utilizes a ramp signal.

18. The process of claim 16 wherein the adiabatic charging utilizes a staircase signal.

19. The process of claim 16 wherein the adiabatic charging utilizes a half-wave sine pulse.

20. The process of claim 13 wherein adiabatic discharging is used to recover energy from the other capacitances.

21. The process of claim 20 wherein the adiabatic discharging utilizes a ramp signal.

22. The process of claim 20 wherein the adiabatic discharging utilizes a staircase signal.

23. The process of claim 20 wherein the adiabatic discharging utilizes a half-wave sine pulse.

24. The process of claim 13 wherein the display is a liquid crystal display, an electroluminescence display or a field-emission display.

25. A circuit for reducing the energy consumed by a display having a plurality of liquid crystal elements, the light passed by each liquid crystal element being regulated by a capacitive element associated with the liquid crystal element, each capacitive element having the ability to be selectively charged by the delivery of current through a line associated with the capacitive element, the line also driving one or more other capacitances in the display other than the capacitive elements, the circuit comprising:

a) a voltage connection system connected to the line for controllably causing the line to connect to a voltage source;

b) a recovery connection system connected to the line for controllably causing the line to connect to a reservoir; and

c) a control system for causing the voltage connection system to connect the line to the voltage source during a first time period and for causing the

15

26.

a)

5

c)

d)

27.

28.

29.

30.

31.

32.

33.

34.

10

36

that is being driven to a controllable voltage level, comprising:

- a) a voltage connection system connected to the capacitive load for controllably causing the capacitive load to connect to a voltage source and for charging the capacitive load using adiabatic charging;
- b) a recovery connection system connected to the capacitive load for controllably causing only a portion of the capacitive load to connect to a reservoir and for discharging only a portion of the load using adiabatic discharging; and
- c) a control system for causing the voltage connection system to connect the capacitive load to the voltage source during a first time period and for causing the recovery connection system to connect the capacitive load to the reservoir during a second time period.

37. The circuit of claim 36 wherein the adiabatic charging and discharging use a ramp signal.

38. The circuit of claim 36 wherein the adiabatic charging and discharging use a staircase signal.

39. The circuit of claim 36 wherein the adiabatic charging and discharging use a half-wave sine pulse.

40. Apparatus for charging and discharging a capacitive load comprising:

- a) a voltage regulator having an input connected to a voltage source, an output, and a control connected to a voltage approximately equal to the voltage to which the capacitive load is to be charged;
- b) a first switch having an input connected to said output of said voltage regulator, an output connected to the capacitive load, and a control connected to a first control signal; and
- c) a second switch having an input connected to the capacitive load, an output connected to the voltage source, and a control connected to a second control signal.

41. The apparatus of claim 40 wherein said first and second control signals are not activated at the same time.

42. Apparatus for generating a control signal used to activate the energy

recovery phase of an apparatus for driving a capacitive load when the voltage of an energy recovery signal becomes approximately equal to the voltage across the capacitive load comprising a comparator having a first input connected to the voltage across the capacitive load, a second input connected to the energy recovery signal, and an output that constitutes the control signal.

43. Apparatus for sampling a desired voltage that is being delivered to a capacitive load, for preserving that voltage for later processing, and for delivering the preserved voltage to a device for later processing, comprising:

- a) a first switch having an input connected to the desired voltage, a control connected to a control signal, and an output;
- b) a capacitor connected to the output of said first switch; and
- c) a voltage regulator having an input connected to a voltage source, a control connected to said capacitor, and an output connected to the device.

44. A method for driving one of a plurality of capacitive elements and one or more other capacitance-generating components that are associated with a line other than the capacitive elements, comprising:

- a) electrically connecting each of the plurality of capacitive elements to the line;
- b) storing charge in the one of the plurality of capacitive elements through the line while each of the other of plurality of capacitive elements is electrically connected to the line; and
- c) recovering energy stored in the other capacitance-generating components while maintaining the charge stored in the one of the plurality of capacitive elements.

45. The method of claim 44, further comprising electrically isolating the one of the plurality of capacitive elements from the line prior to recovering the energy stored in the other capacitance-generating components.

46. The method of claim 44, wherein adiabatic charging is used to charge the one of the plurality of capacitive elements along with at least a portion of the capacitance-generating components.



47. The method of claim 46, wherein the adiabatic charging uses a ramp signal.
48. The process of claim 46, wherein the adiabatic charging uses a staircase signal.
49. The process of claim 46, wherein the adiabatic charging uses a half-wave sine pulse.
50. The method of claim 44, wherein adiabatic discharging is used to recover energy from the other capacitance-generating components.
51. The method of claim 50, wherein the adiabatic discharging uses a ramp signal.
52. The process of claim 50, wherein the adiabatic discharging uses a staircase signal.
53. The process of claim 50, wherein the adiabatic discharging uses a half-wave sine pulse.
54. The process of claim 44, wherein the capacitive elements form pixels of a display.
55. The process of claim 44, wherein the display is one of a liquid crystal display, an electroluminescence display, and a field-emission display.
56. The process of claim 44, wherein the capacitive elements form at least a portion of a capacitive electrostatic transducer.
57. A method for reducing the energy consumed in driving a capacitive load that is being driven to a controllable voltage level, comprising:
  - a) controllably causing the capacitive load to connect to a voltage source;
  - b) charging the capacitive load using adiabatic charging;
  - c) controllably causing only a portion of the capacitive load to connect to a reservoir; and
  - d) discharging only a portion of the load using adiabatic discharging.
58. A process for reducing the energy consumed by a display having a plurality of liquid crystal elements arranged in a matrix of rows and columns, the light

passed by each liquid crystal element being regulated by a capacitive element associated with the liquid crystal element, each capacitive element having the ability to be  
 5 selectively charged by the delivery of current through a line associated with the capacitive element, the line also driving one or more other capacitances in the display other than the capacitive elements, each of the plurality of liquid crystal elements being driven to the approximate voltage of a serial video signal, the process comprising:

- a) storing the voltage of the video signal for each capacitive element  
 10 in a storage device;
- b) applying the stored voltage for each capacitive element to each capacitive element through a first voltage regulator; and
- c) recovering energy from the other capacitances using a second voltage regulator.

59. The process of Claim 58 wherein adiabatic charging is used in applying the stored voltage.

60. The process of Claim 58 wherein adiabatic discharging is used in recovering the energy.

61. The process of Claim 58 wherein the first and second voltage regulators constitute the same device.

62. Apparatus for charging a capacitive load to a controllable voltage level comprising:

- a) a connection for receiving a signal representative of the controllable voltage level;
- b) a time-varying voltage supply for generating a time-varying voltage that varies from a voltage at one time that is less than the controllable voltage level to a voltage at another time that is greater than the controllable voltage level;
- c) an electronic switch in communication with the time-varying voltage supply and the capacitive load for opening and closing a connection between said time-varying voltage supply and the capacitive load to be charged; and
- d) a control circuit connected to said electronic switch for causing said switch to close at a point in time when the magnitude of the voltage on the capacitive

load is less than the magnitude of the controllable voltage level and for causing said switch to open at a point in time when the magnitude of the voltage on the capacitive load is close to or equal to the magnitude of the controllable voltage level.

63. The apparatus of Claim 62 wherein said time-varying voltage supply generates a ramp signal.

64. The apparatus of Claim 62 wherein said time-varying voltage supply generates a staircase signal.

65. The apparatus of Claim 62 wherein said time-varying voltage supply generates a half-wave sine pulse.

66. The apparatus of Claim 62 wherein said control circuit communicates the signal representative of the controllable voltage level to said electronic switch.

67. The apparatus of Claim 66 wherein the signal representative of the controllable voltage level is connected to said electronic switch.

68. Apparatus for discharging a capacitive load from a voltage level comprising:

- a) a time-varying voltage supply for generating a time-varying voltage that varies from a voltage at one time that is more than the voltage level to a voltage at another time that is less than the voltage level;
- b) an electronic switch in communication with the time-varying voltage supply and the capacitive load for opening and closing a connection between said time-varying voltage supply and the capacitive load to be discharged; and
- c) a control circuit connected to said electronic switch for causing said switch to close at a point in time when the magnitude of the time-varying voltage supply is equal to or less than the magnitude of the voltage level on the capacitive load and for causing said switch to open at a point in time after the capacitive load has been substantially discharged.

69. The apparatus of Claim 68 wherein said time-varying voltage supply generates a ramp signal.

70. The apparatus of Claim 68 wherein said time-varying voltage supply generates a staircase signal.

71. The apparatus of Claim 68 wherein said time-varying voltage supply generates a half-wave sine pulse.

72. The apparatus of Claim 68 wherein a signal representative of the voltage level is connected to said electronic switch.

73. A process for charging a capacitive load to a controllable voltage level comprising:

- a) receiving a signal representative of the controllable voltage level;
- b) generating a time-varying voltage with a time-varying voltage supply that varies from a voltage at one time that is less than the controllable voltage level to a voltage at another time that is greater than the controllable voltage level;
- c) closing a connection with an electronic switch between the time-varying voltage supply and the capacitive load to be charged at a point in time when the magnitude of the voltage on the capacitive load is less than the magnitude of the controllable voltage level; and
- d) opening a connection with an electronic switch between the time-varying voltage supply and the capacitive load to be charged at a point in time when the magnitude of the voltage on the capacitive load is close to or equal to the magnitude of the controllable voltage level.

74. A process for discharging a capacitive load from a voltage level comprising:

- a) generating a time-varying voltage with a time-varying voltage supply that varies from a voltage at one time that is more than the voltage level to a voltage at another time that is less than the voltage level;
- b) closing a connection with a switch between the time-varying voltage supply and the capacitive load to be discharged at a point in time when the magnitude of the time-varying voltage supply is equal to or less than the magnitude of the controllable voltage level on the capacitive load; and
- c) opening a connection with a switch between the time-varying voltage supply and the capacitive load to be discharged at a point in time after the capacitive load has been substantially discharged.

## ABSTRACT

Power-efficient, pulsed driving of capacitive loads to controllable voltage levels, with particular applicability to LCDs. Energy stored in a portion of the capacitive load is recovered during a recovery phase. Time-varying signals are used to drive the load and to  
5 recover the stored energy, thus minimizing power losses, using processes named adiabatic charging and adiabatic discharging.

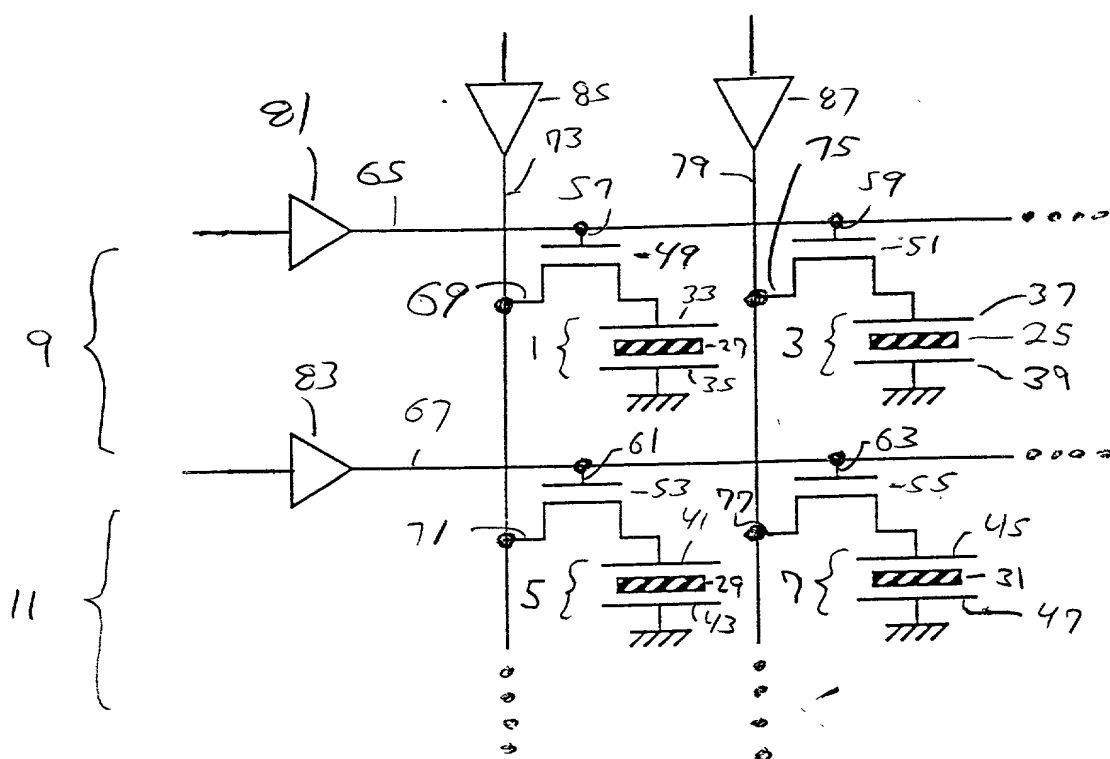


FIG. 1 (Prior Art)

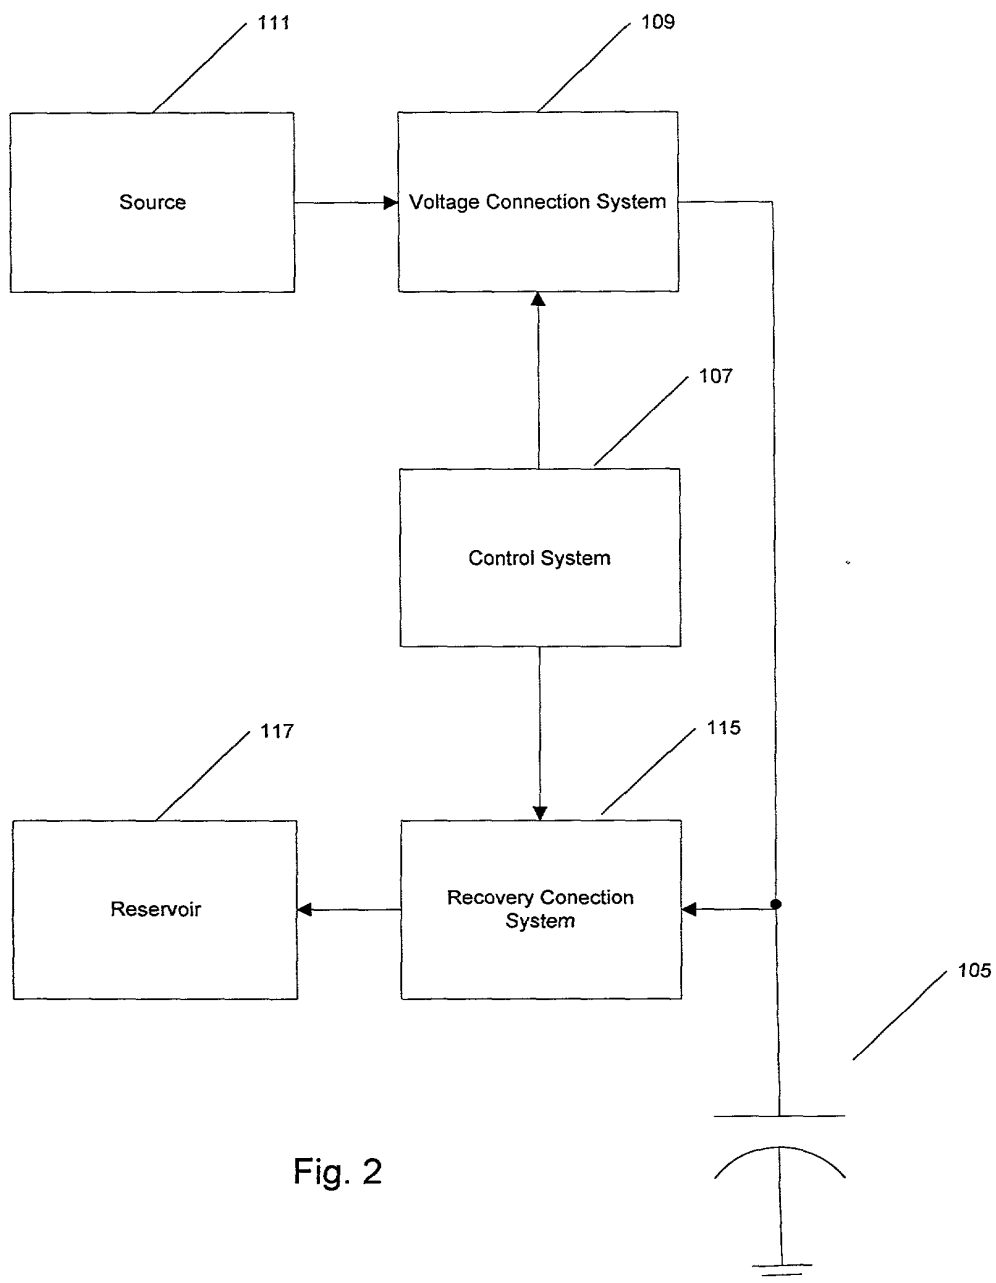


Fig. 2

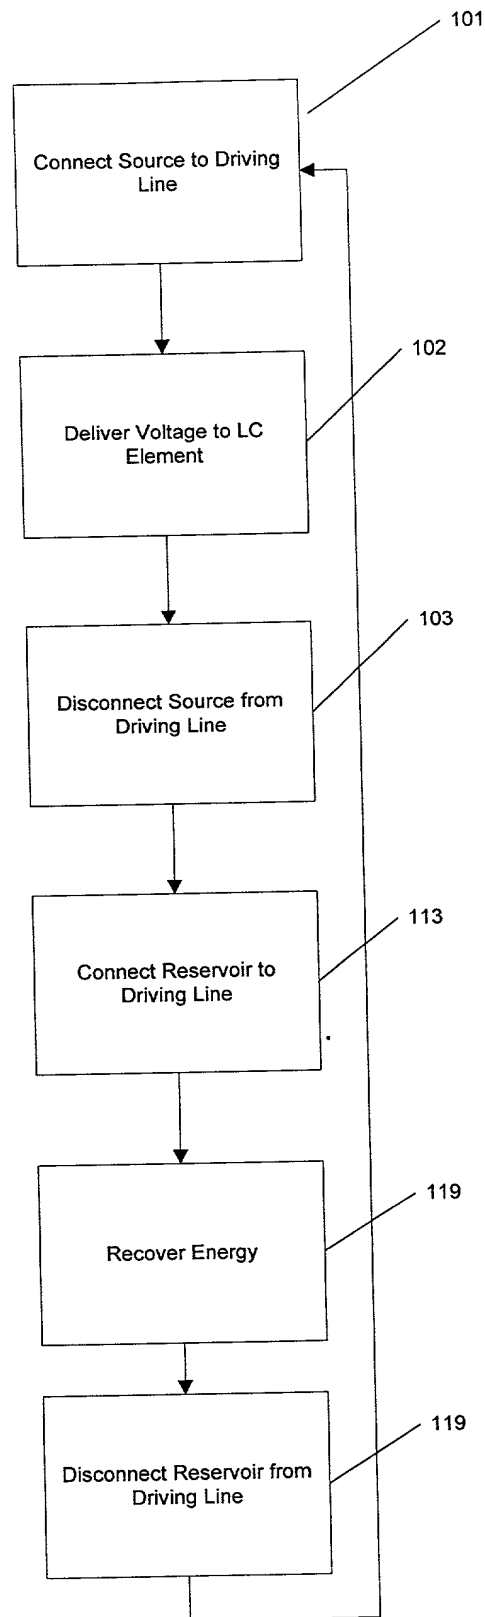


Fig. 3



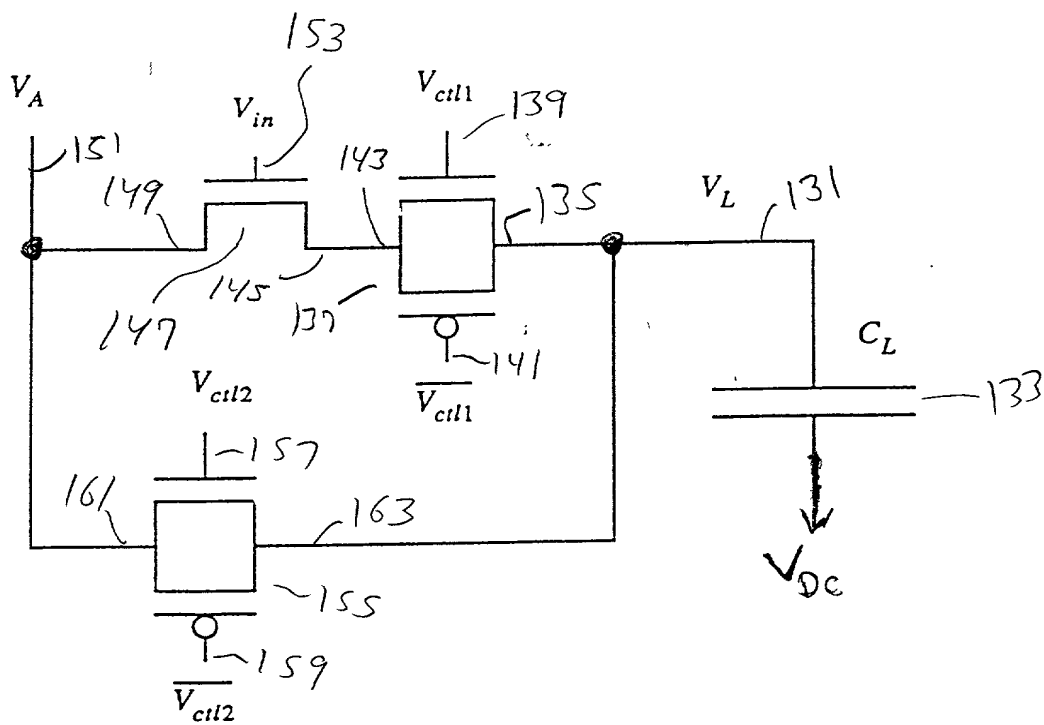


FIG. 4

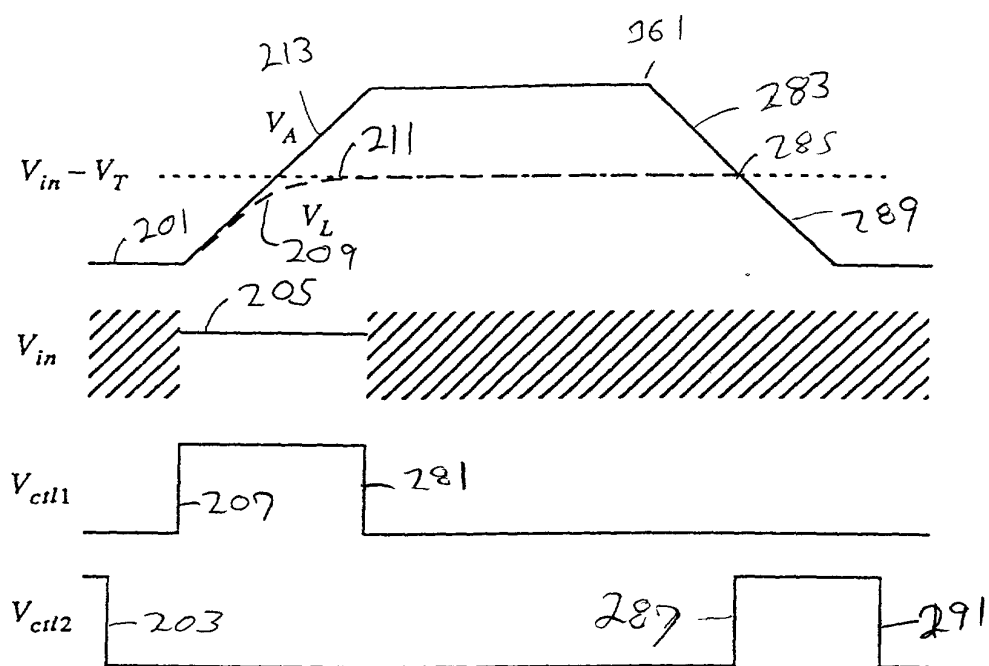


Fig. 5

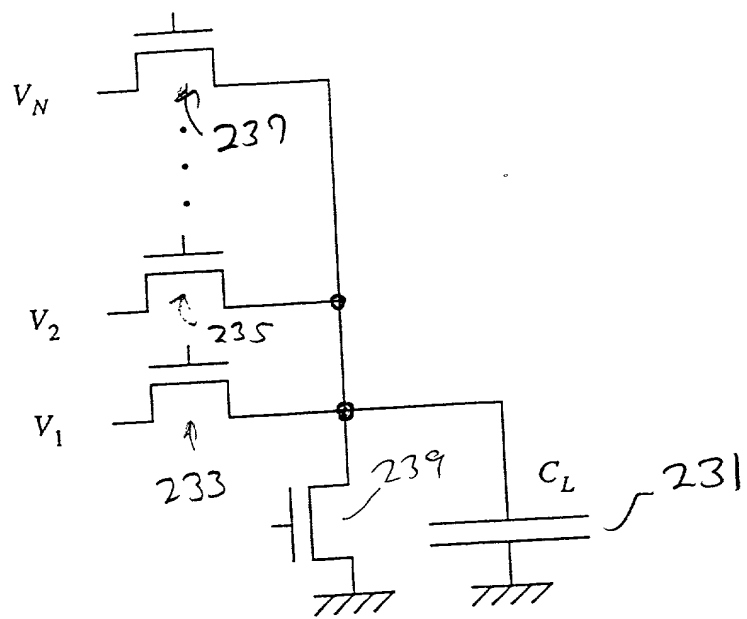


Fig. 6

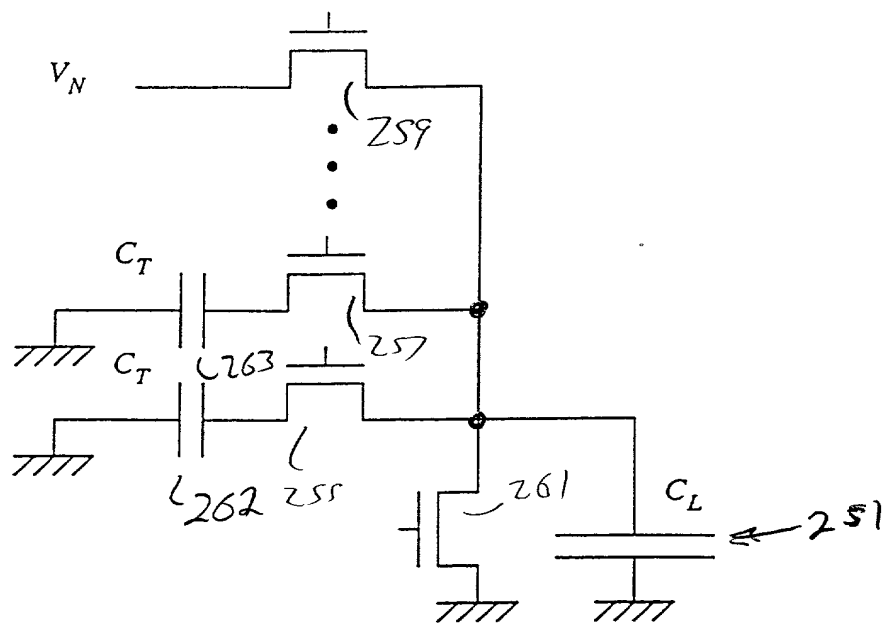


Fig. 7

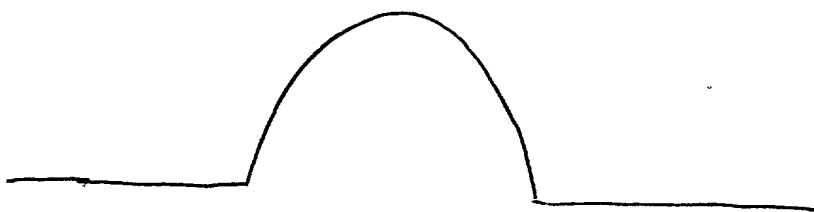


Fig 8

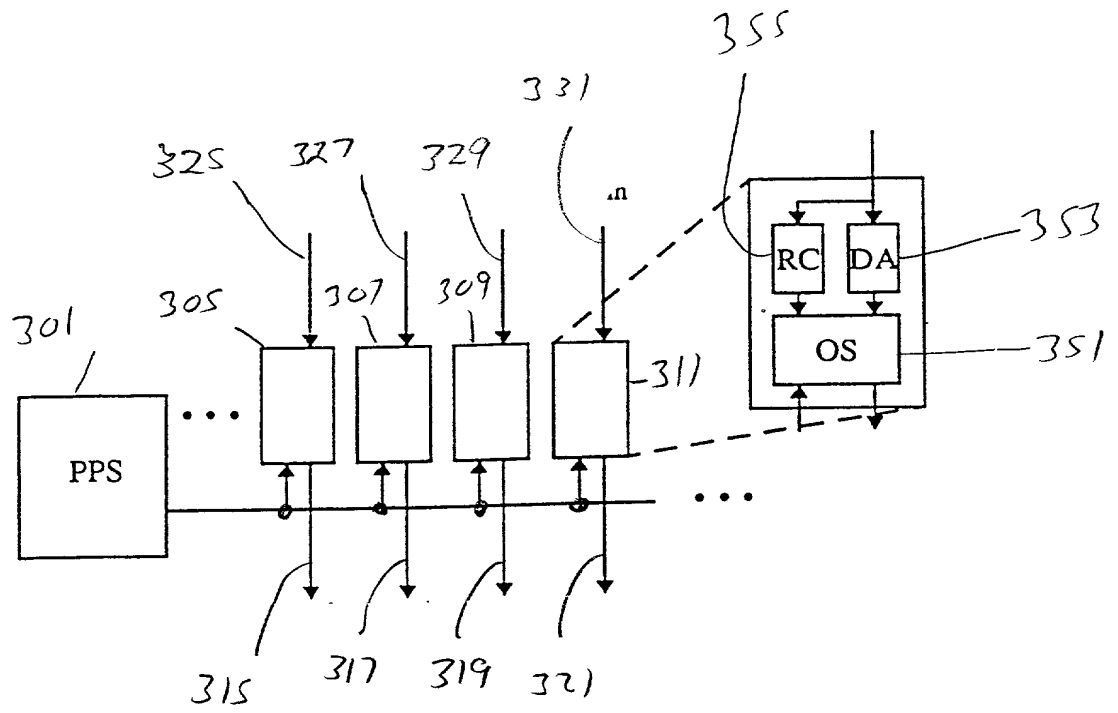


Fig 9

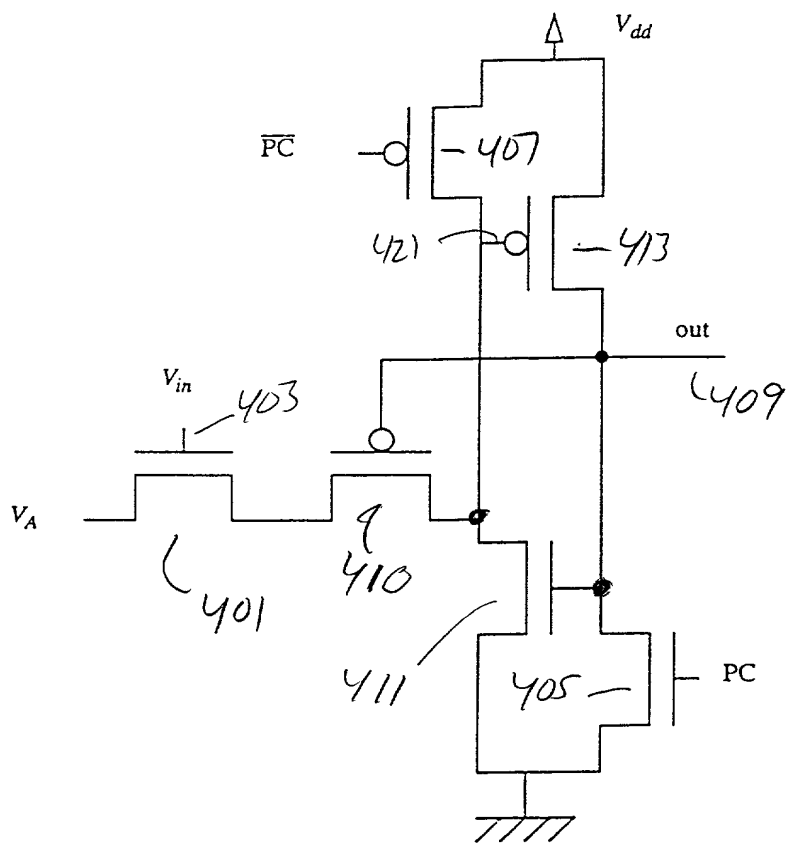


Fig. 10

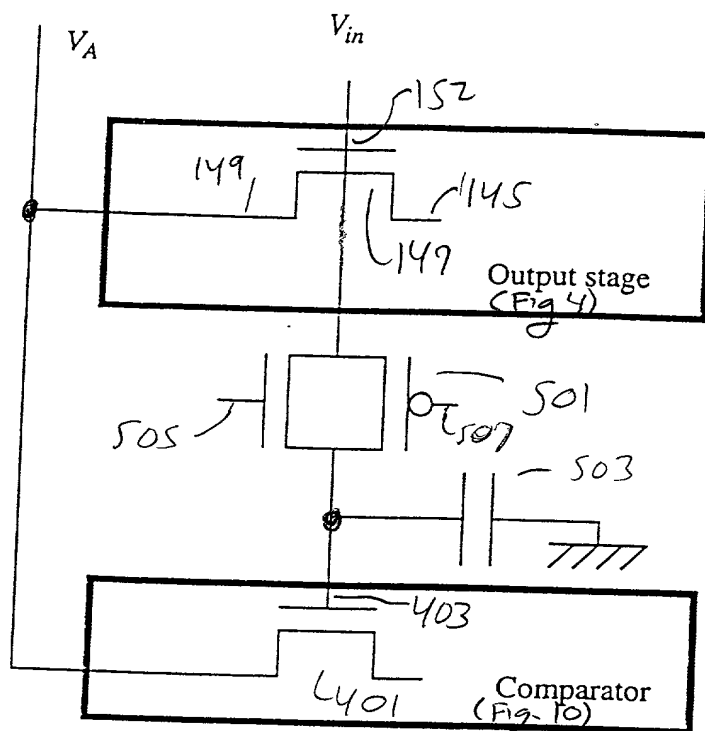


Fig 11



660650 F4858E50

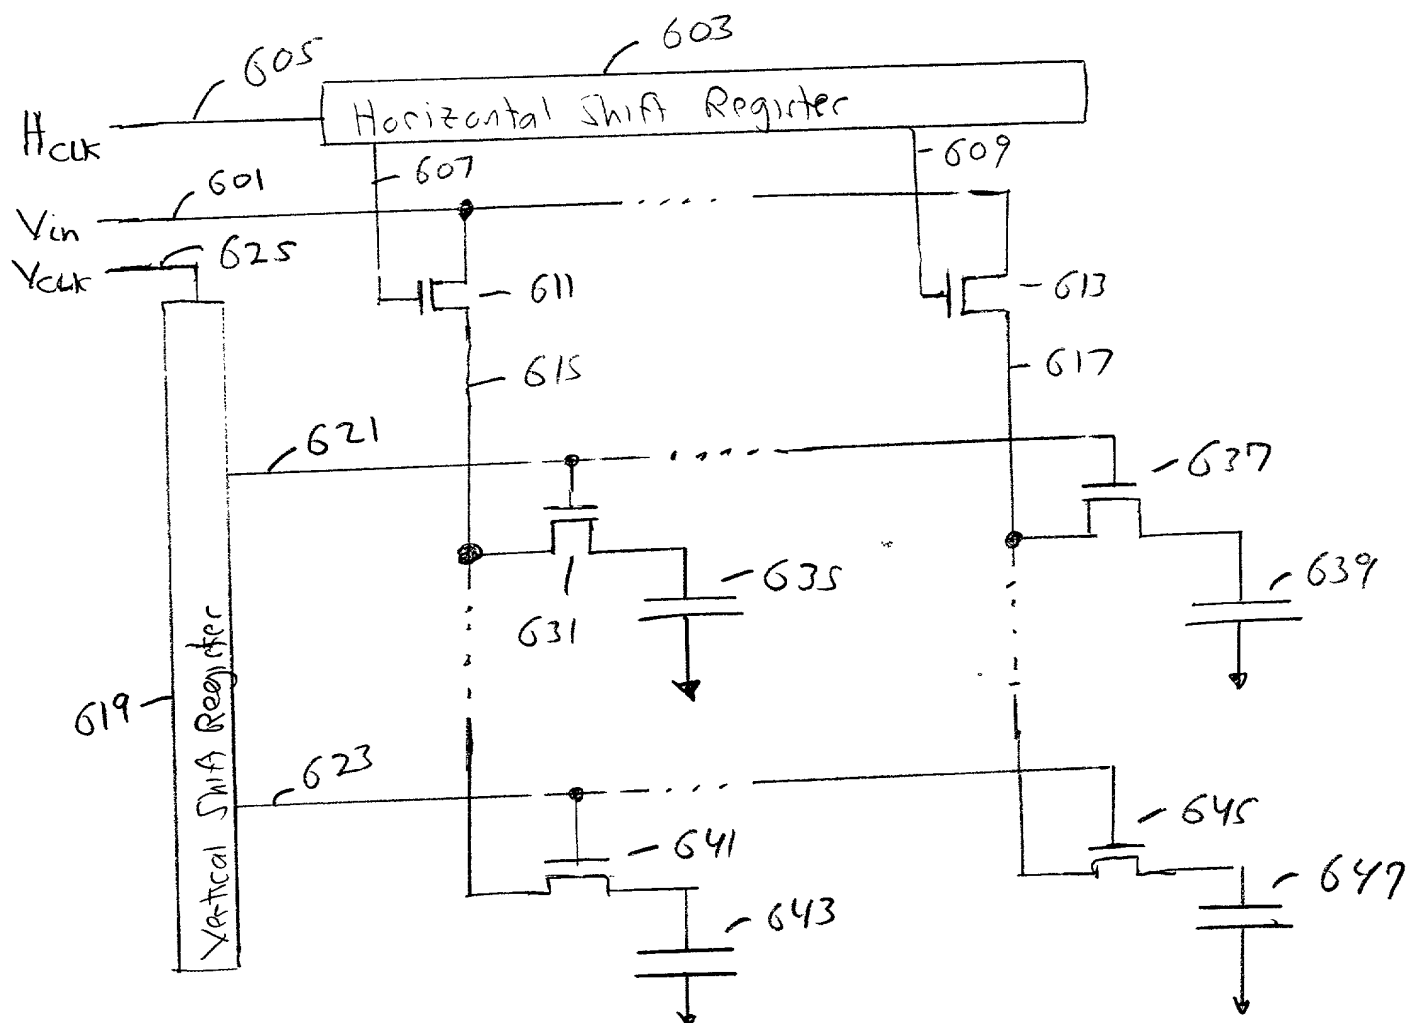


Fig. 12 (Prior Art)

66E060-TH35560

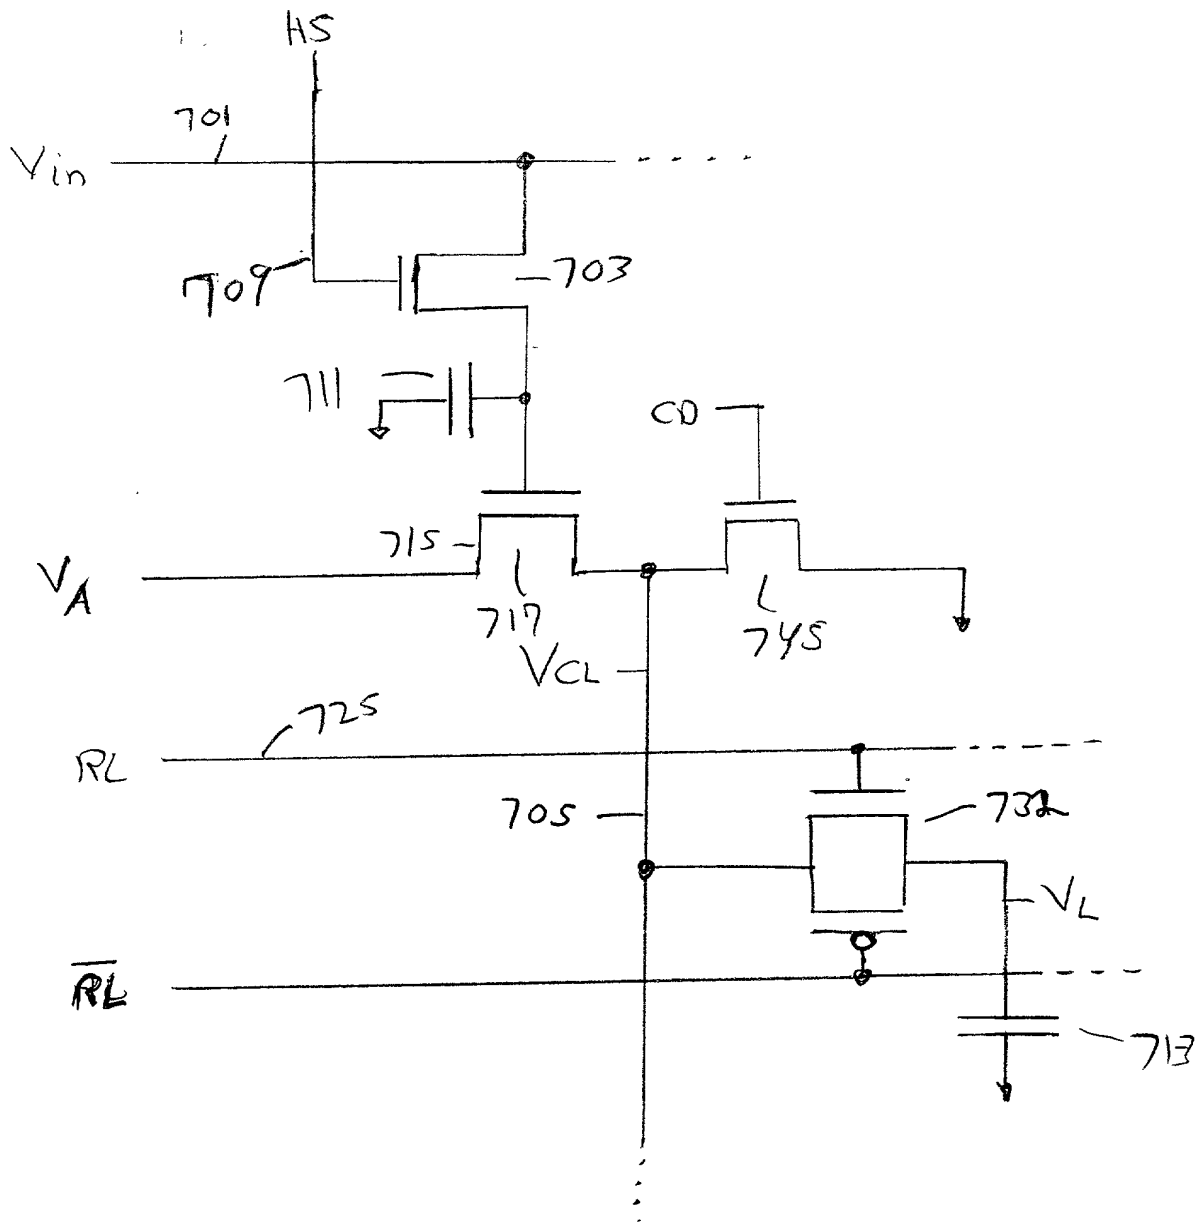


Fig. 13

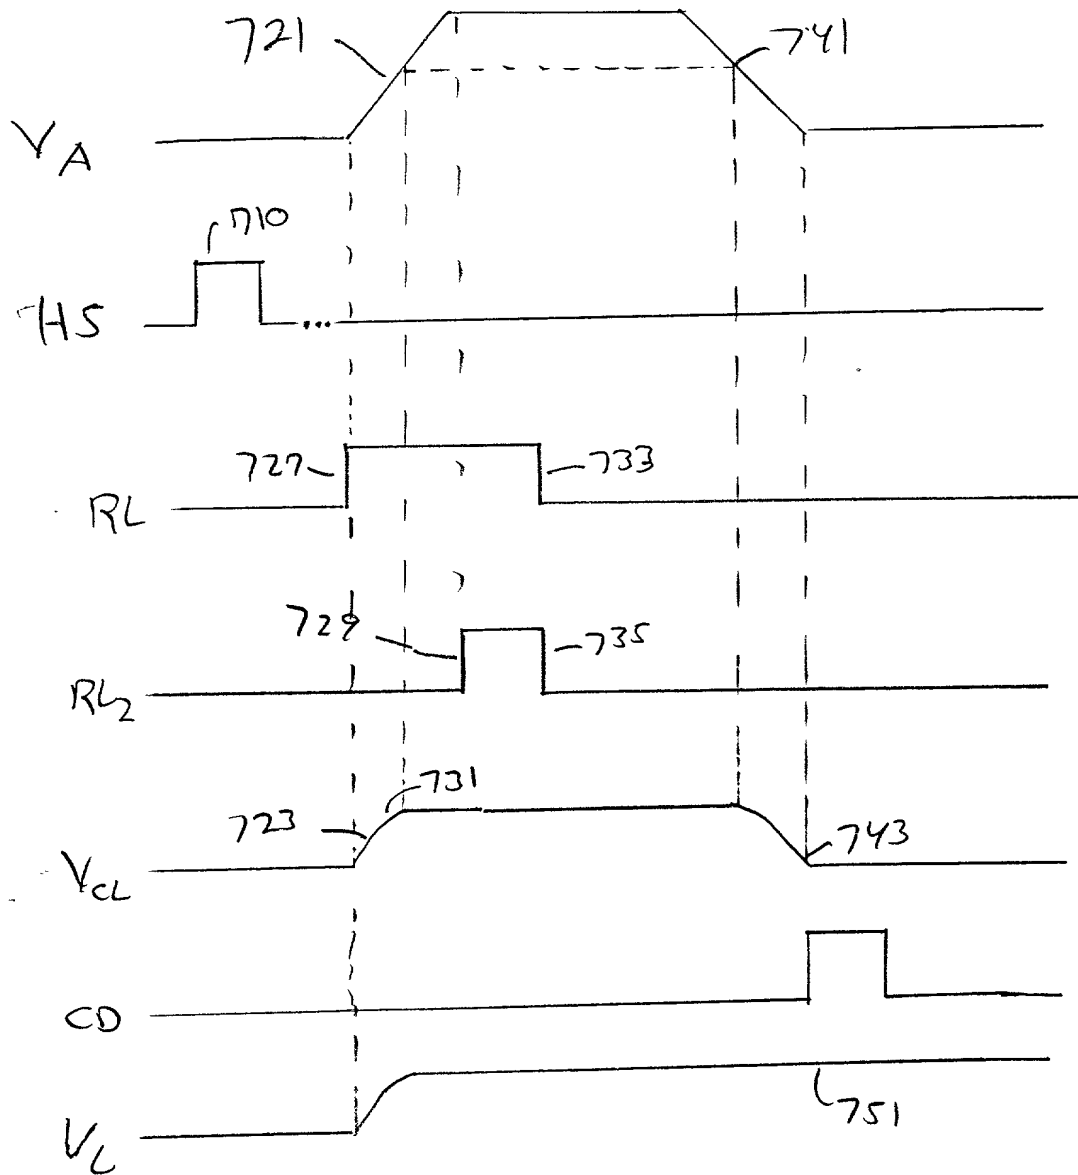


Fig. 14